


1      2      3      4      5      6      7      8

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

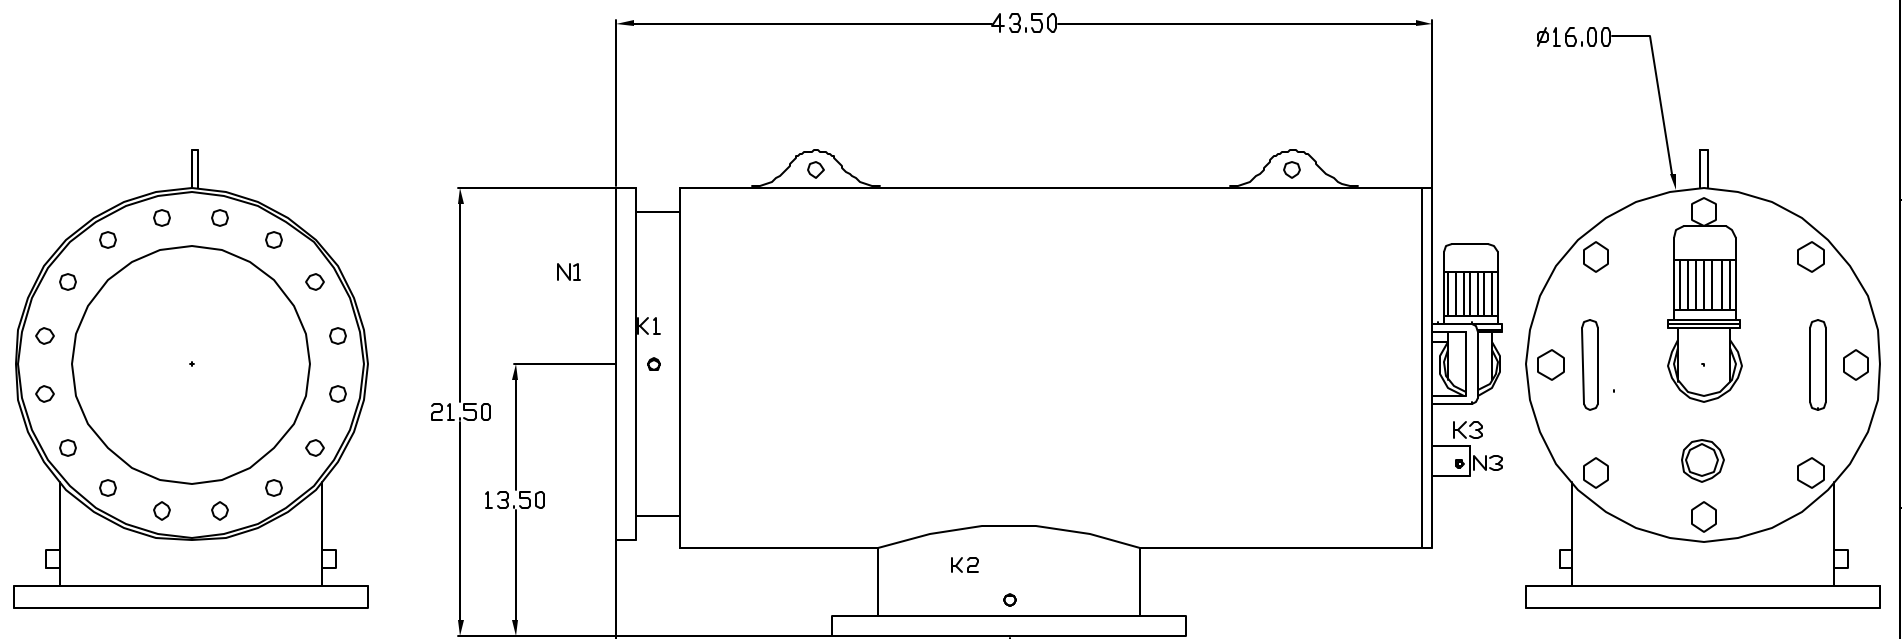

**TECHNICAL DATA**

Flow Rate	Max. 1750 GPM
Screen Size	_____ Micron
Screen Area	7.0 sq.ft
Working Temp.	200 deg. F
Working Pressure	150 PSI
Empty Weight	400 lbs.
Full Weight	_____ lbs.

NOZZLE	CONNECTION	TYPE OF CONNECTION	SIZE	RATING
K1	Hi. Press. Conn.	Threaded	1/4" NPT(2)	
K2	Low Press. Conn.	Threaded	1/4" NPT(2)	
K3	Hydraulic Conn.	Threaded	1/4" NPT(2)	
N1	Inlet	Flanged	10" ASA	150 lbs. F.F.
N2	Outlet	Flanged	10" ASA	150 lbs. F.F.
N3	Flushoutlet	Threaded	2" NPT	

<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES</small> <small>DECIMALS      ANGULAR</small> <small>XX ± .05      ± 0.5 DEG</small> <small>XXX ± .01</small>		<b>AUTOMATIC FILTERS, INC.</b> 2672 S. LA CIENEGA BLVD. LOS ANGELES, CA 90034 (310) 839-2828 FAX (310) 839-6878	
<small>DRAWN</small> Daniel Stenberg		<small>DATE</small> 4-10-06	
<small>CHECKED</small>		<small>TITLE</small> CSB 10 Coarse Screen Brush Filter	
<small>DESIGN</small>		<small>SIZE</small> A	<small>DWG NO.</small> CSB10
		<small>REV</small> 0	<small>SHEET OF</small>
		<small>NOT SCALE</small>	<small>SHEET OF</small>